

GUTMANN FPS-K EXPOSED FALL PREVENTION SYSTEM






GUTMANN FPS-K Exposed fall prevention system

Thanks to an intelligent configurator, ordering our new FPS-K sets – including pre-packed fixing materials – is really easy. Fast, easy mounting characterises the FPS-K system, which can also be used in combination with roller blinds, Venetian blinds and insect screen systems.

Floor-to-ceiling windows as a design element are gaining in popularity not only in modern office buildings, but also in private homes. Unlike balcony doors, they open into a void, so this type of window must be equipped with a special fall prevention system. One of the main concerns of modern architecture is to provide an unobstructed view outside without neglecting safety issues.

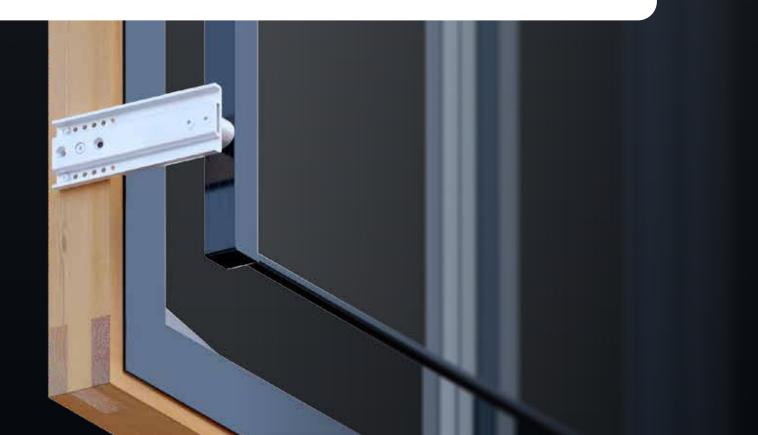







24/7 ONLINE ORDERING VIA TUULO DIN 18004-4 WITH ABP CERTIFICATE

EASY FITTING

- For mounting on frame materials such as wood, wood-aluminium, plastic and plastic-aluminium, regardless of system supplier.
- Heights between 500 and 1200 mm and widths from 500 – 2200 mm can be freely configured.
- Tested for glass thicknesses 12.76 mm and 16.76 mm.
- All sets include pre-packed fixing material i.e., all fixing materials for the corresponding frame material.
- Further functional elements such as insect screen systems, roller blinds, venetian blinds etc. can be fitted between FPS and window.
- Consoles in the lengths 125 mm, 150 mm or 175 mm are used for distancing.
- Fast, easy fixing without further mechanical processing of the FPS-K.
- The FPS mounting brackets are hidden from view in the ETICS or brick façade.
- Prompt availability of in-stock standard colours RAL 9016, RAL 7016 GM and E6/EV1. Edge protection also available in EV1.
- Also available in all special colours on request.
- Uniform appearance of the entire fall prevention system, as the edge protection and cover are supplied in the same colour as the main profiles.
- Customer-optimised labelling with their specific information about order and item number..




LUMINIUM SHAPED BY GUTMANA




GUTMANN FPS-K

Exposed fall protection system in pre-packed sets for the following frame materials and glass thicknesses 12.76 mm und 16.76 mm.




WOOD-ALUMINIUM WINDOW-SYSTEM


WOODEN WINDOW







PVC-SYSTEM

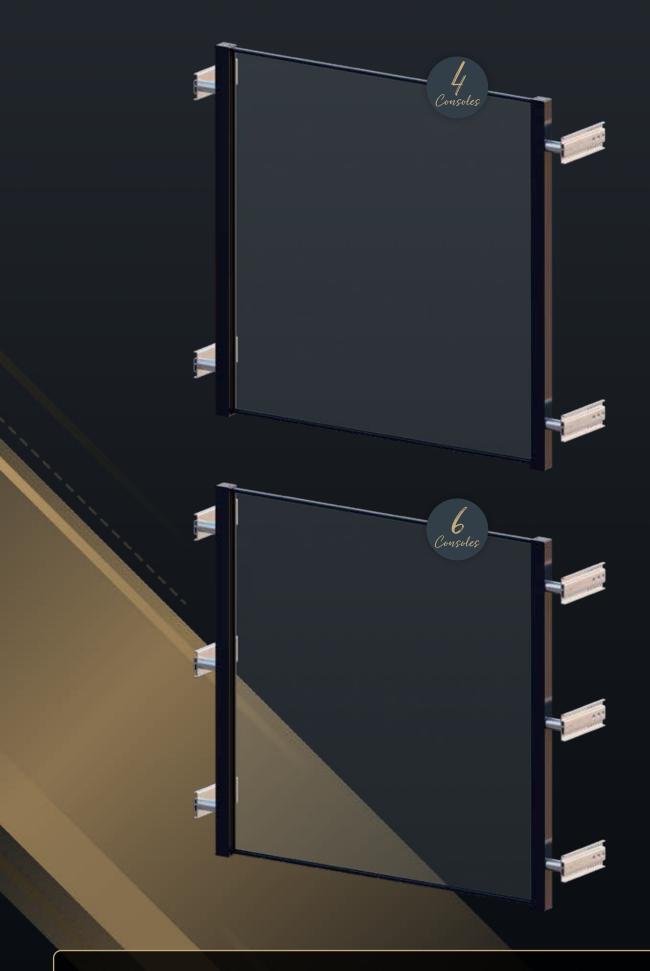

CONSOLE FIXING 110 MM FROM THE OUTER EDGES OF THE BASIC PROFILE. MAXIMUM DISTANCE FROM ONE ANOTHER 800 MM. IF DISTANCE BETWEEN CONSOLES IS MORE THAN 800 MM, AN ADDITIONAL CONSOLE MUST BE FITTED MIDWAY BETWEEN THEM.

FURTHER FUNCTIONAL ELEMENTS SUCH AS INSECT SCREEN SYSTEMS, ROLLER BLINDS, VENETIAN BLINDS ETC.

CAN BE FITTED BETWEEN FPS AND WINDOW.




Order online with tuulo

Thanks to an intelligent configurator, ordering our FPS sets is really easy.

tuulo is a GUTMANN digital tool that allows you to plan and order windows, doors and window sills really fast on your computer or tablet. All you need is your browser window. tuulo provides information about stock levels, delivery times and order status. tuulo not only calculates all orders in accordance with the agreed delivery terms, but can also handle complex configurations such as window sills and edging.



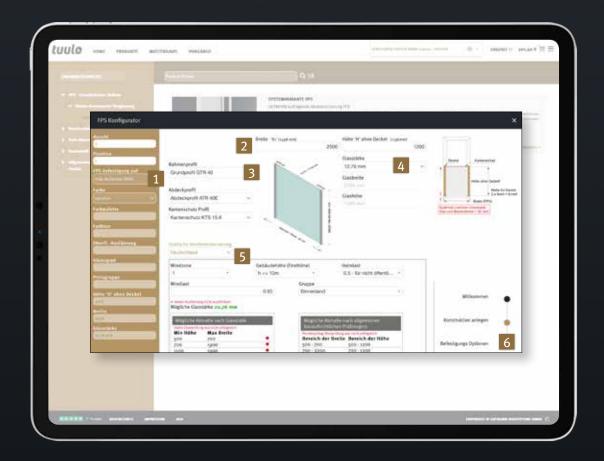

Order with just a few clicks

Tuulo provides a static pre-dimensioning function which makes it easier for customers to fulfil statutory requirements and standards. It is still possible to configure elements with any required dimensions, even if they are not within our approval limits.

- 1 Select system type and colour
- 2 Enter dimensions
- 3 Select frame profile

- 4 Select glass thickness
- 5 Start static pre-dimensioning check
- 6 Add to shopping cart



GUTMANN fall prevention systems

Elegant, timeless design for maximum safety





EUULCPOWERED BY GUTMANN